


Écrans d'affichage dynamique Sharp

# SHARP/ NEC MULTISYNC M981 AIRSERVER

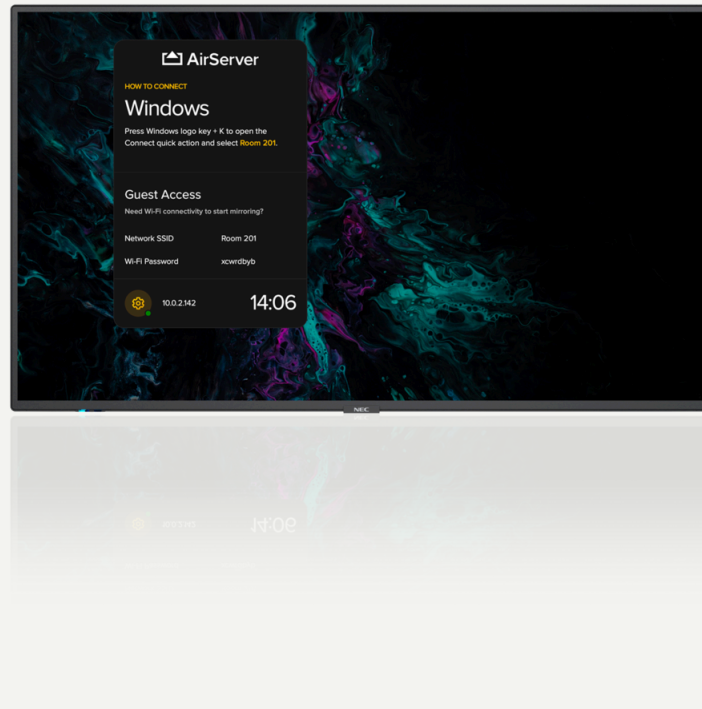

Perfect for meeting rooms and huddle spaces, the MultiSync AirServer models provide a sleek combination of intuitive screen sharing with professional display technology, supporting effortless collaboration.

- Unhindered readability – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation.
- Enhanced imaging performance – advanced settings of visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.
- Secure remote management – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources.
- Mission-critical 24/7 ready operation – the selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- Future Ready Connectivity – featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

# Spécifications

## Accessoires

[AVSpecificationAccessories]	Émetteur de la télécommande, Manuel d'installation, Cordon d'alimentation, Câble HDMI, Support de montage, Pied de bureau, Support amovible, Pile
Shipping Content	2x batteries AAA, Affichage, Câble HDMI, Cordon d'alimentation, Télécommande, Manuel de configuration
Special Characteristics	Frame Comp, Port USB alimenté (10 W), Logo amovible, Port USB alimenté (15 W)
Fonctionnement 24/7 certifié	True
Garantie limitée du fabricant (ans)	3
Gradation locale	True
Enceintes intégrées (W)	10 + 10
Gestion de l'alimentation	True
Couleur du boîtier	Noir
Détecteur de température	True
Détecteur de luminosité	True
Mode "Picture in Picture" (Image dans l'image)	True
Mode "Picture by Picture" (Image par image)	True
Planification / Minuterie	True
Gestion à distance	True
Contrôle du gain	True
Notification par email	True
SNMP	True
Tension de fonctionnement (ACV) / Fréquence (Hz)	100-240
Tension de fonctionnement (ACV) / Fréquence (Hz)	50-60
Consommation énergétique (W) (Fonctionnement MAX)	340
Température de fonctionnement (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	80
Paysage	True
Portrait	True
Montage (VESA/Nombre de points/Espacement mm)	600 x 400 (FDMI)
Montage (VESA/Nombre de points/Espacement mm)	4
Spécifications des vis de montage (Taille/Longueur maximale)	M8
DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1
Taille du biseau (G/D) mm	14
Taille du biseau (H) mm	14
Taille du biseau (B) mm	15
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Haze Level [%]	Pro 28

## AirServer Embedded Screen Mirroring Solution

Miracast	Android and Windows, extend Windows 10 desktop, Miracast over infrastructure, screen mirroring, touchback and pen support
Airplay	Code and password, extend macOS display, iOS, iPadOS and macOS, screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome, prompt security, screen mirroring and cast from apps with DRM
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	Provides new features and security enhancements
Technologie du panneau	IPS with Direct LED backlights
Résolution native (Pixels)	3840 x 2160
Rapport d'aspect	16:9
Technologie de rétro-éclairage	Direct LED
Luminosité (cd/m2)	500
Taux de contraste	8000:1
Temps de réponse (moy. gris à gris) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (10bit)
Dimensions de l'emballage (L/H/P) mm	2350
Dimensions de l'emballage (L/H/P) mm	1400
Dimensions de l'emballage (L/H/P) mm	310
Poids du produit sans le pied (Kg)	67
Poids d'expédition (kg)	99
DisplayPort	2
HDMI	2
Entrée audio 3.5mm	1
Entrée RS232C	1
Port réseau	1
USB	3
Taille diagonale (cm)	98
Taille diagonale (cm)	249
Energy Star	True

