Imprimantes de production légère


# MXM1056EU




## Le MXM1056EU est un puissant système d'impression de production légère en noir et blanc qui offre une productivité maximale et des coûts d'exploitation réduits.

- Système de production légère haut volume avec des vitesses allant jusqu'à 105 ppm et une résolution de 1 200 × 1 200 dpi
- Le serveur Fiery® (en option) permet de gérer des environnements d'impression à la demande
- Le DSPF de 300 feuilles numérise des documents à 240 ppm (recto-verso) et traite du papier allant jusqu'à 220 g/m2 d'épaisseur.
- Une productivité accrue grâce aux options de magasin papiers de grande capacité, incluant la compatibilité SRA3, pour une impression ininterrompue plus longue.
- Ecran tactile de 15,4'' interactif avec prévisualisation, modification et gestion des files d'attente
- Une facilité d'utilisation grâce à des icônes utilisateur dédiées pour faciliter la connexion, un panneau de commande qui s'incline pour faciliter la visualisation et une option de lampe témoin
- Vaste gamme d'options de finition, y compris la perforation en ligne GBC et la finition en ligne Plockmatic, pour une fabrication professionnelle de livrets en interne.
- Protection avancée du système/des données et contrôle d'accès, y compris l'auto-récupération du micrologiciel et la liste blanche.

# Configurations

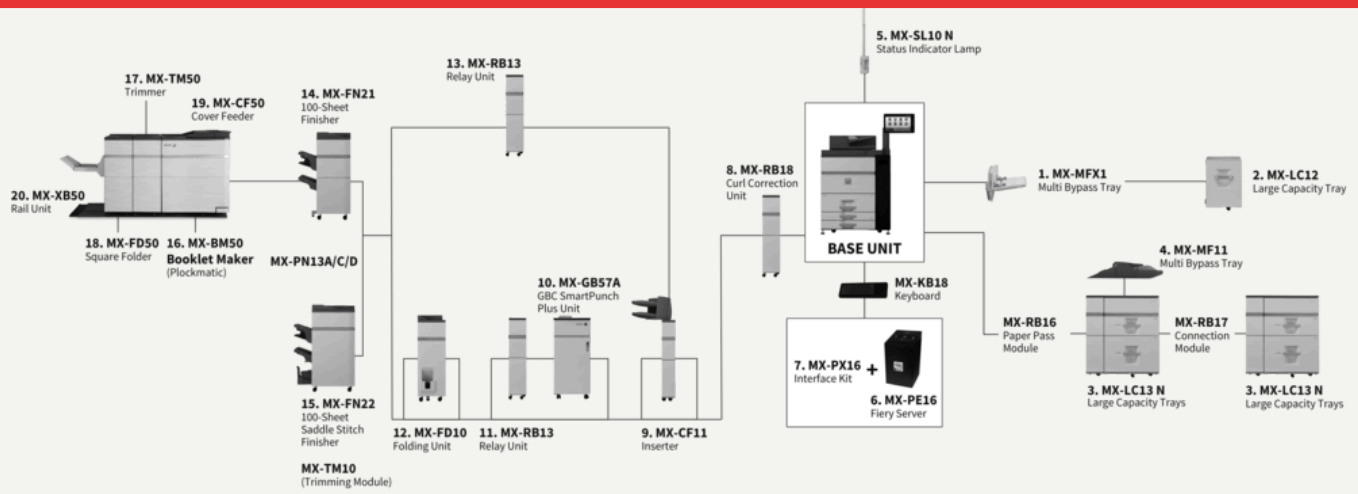


# Dimensions

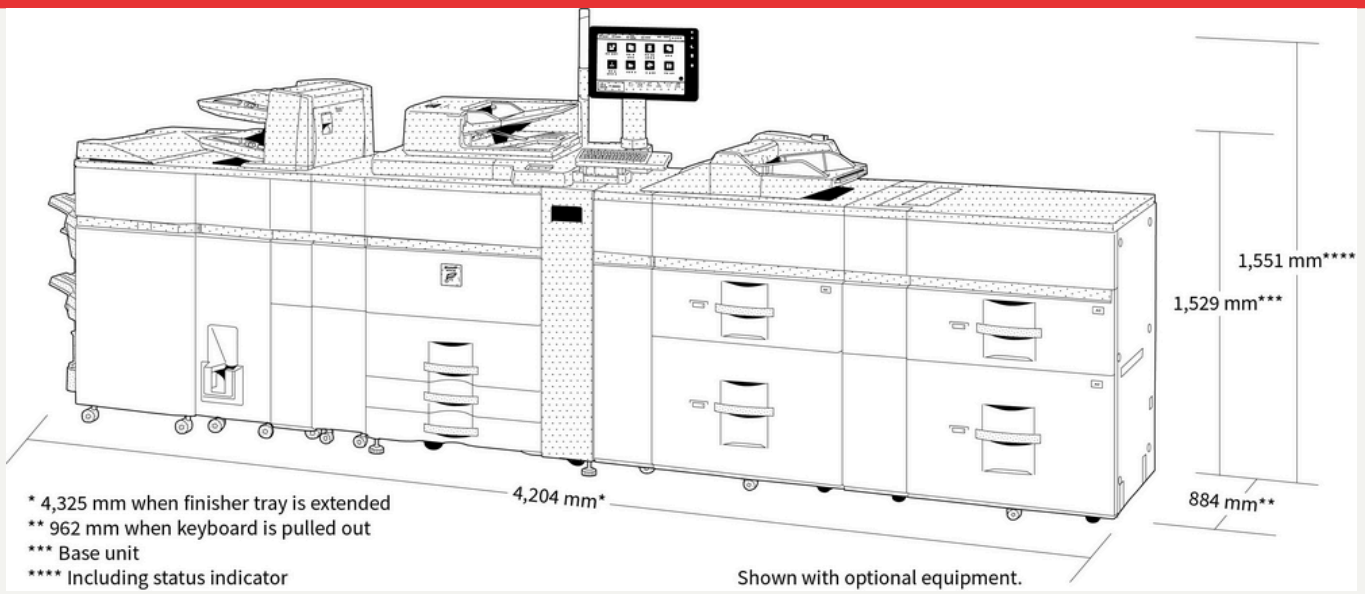

# Options

## Unité de base

**MX-MF11**

**MX-LC12**

**MX-SL10N Status Indicator**

**MX-KB18**

**MX-PX16**

**MX-MFX1 Multi Bypass Tray (for main machine)**

**MX-PE16 Fiery® Print Server Fiery Server**
High performance, production class workflow solution for high volume CRDs With the MX-PE16 Fiery® Print Server, Light Production Printing Systems become powerful integrated solutions for managing office workgroups and production environments. • Deliver fast processing speed • Achieve unparalleled image quality • Offer powerful features that produce complex finished documents

**Sharp MX-LC13N Large Capacity Tray (A3)**
SRA3-A4R (also supports 13" x 19.2"), 2,500 sheets each (80gsm); Requires MX-RB16. Cannot be installed with MX-LC12 or MX-LCX3 N.

## Impression

**MX-PF10 Kit de polices de codes à barres**
Permet l'impression de codes à barres

## Sharp OSA

**MX-AMX1 Module d'intégration d'applications**

## Sécurité

**MX-FR66U Data Security Kit**

## Finition

**MX-FD10**

**MX-CF11**

**MX-RB13**

**MX-RB17**

**MX-XB50 Rail Unit (Plockmatic)**

**MX-TM10**

**MX-RB18 Curl Correction Unit**

**MX-PN13A Punch Module - 2 Hole**
Punch module for MX-FN21/MX-FN22

**MX-GB57A GBC Smart Punch Unit**
Available die sets: 21 holes, Plastic Comb; 20 holes, Plastic Comb; 47 holes, Color Coil; 23 holes, Wire 2:1/Square; 23 holes, Wire 2:1/Round; 34 holes, Wire 3:1/Square; 34 holes, Wire 3:1/Round; 12 holes, VeloBind; 34 holes, PloClick; 2 holes/Round (8mm pin); 4 holes/Round (8mm pin); 2 holes/Round (6.5mm pin); 4 holes/Round (6.5mm pin); 4 holes Scandinavian; Custom die sets also available on request; Requires MX-RB13 and either MX-FN21 or MX-FN22.

**MX-PN13C Punch Module - 4 Hole**
Punch module for MX-FN21/MX-FN22

**MX-RB16 Unidad de paso del papel**
(entre la máquina y MX-LC13 N). Requiere si MX-LC13 N está instalado.

**MX-PN13D Punch Module - 4 Hole Wide**
Punch module for MX-FN21/MX-FN22

**MX-FN22 Saddle Stitch Finisher**
(4k - 100-sheet staple) A4, A3, SRA3; Paper size: 206 x 275 mm (Min) to 320 x 457.2 mm (Max); Paper Weight: 60 -300 g/m2 Capacity: 1-20 sheets (stapled and folded); Requires MX-RB27.

**MX-FN21 Finisher**
(4k - 100-sheet staple); A3 - B5 (offset/staple), SRA3 - A5R (non offset).; Requires MX-RB27. Cannot be installed with MX-FN22.

**Sharp MX-TM50 Trimmer (for Plockmatic)**

**Sharp MX-FD50 Square Folder (for Plockmatic)**

**Sharp MX-CF50 Cover Feeder**

**Sharp MX-BM50 Booklet Maker (Plockmatic)**

# Spécifications

## Général

| | |
|---|---|
| Vitesse de production N&B ppm (A4) | 105 |
| Technologie | 52 |
| Grammage papier : Min | 52 |
| Grammage papier : Max | 300 |
| Capacité papier: std. (feuilles) | 3100 |
| Capacité papier: max. (feuilles) | 13500 |
| Préchauffage (sec.) | 200 |
| Mémoire maximum (GB) | 6 |
| Stockage : Std | HDD |
| [MFPSpecificationHddCapStdGb] | 1000 |
| Recto verso | Std. |
| Puissance requise : fréquence Min. (Hz) | 50 |
| Puissance requise : fréquence Max. (Hz) | 60 |
| Consommation d´énergie (kW) | 299 |
| Poids (kg) | 276 |
| Puissance requise : voltage Min. (V) | 200 |
| Puissance requise : voltage Max. (V) | 240 |

## Kopie

| | |
|---|---|
| Format papier de l'original Max | A3 |
| Sortie première copie N&B (sec.) | 3,2 |
| Tri électronique | Opt. |
| Copie continue (max. copies) | 9999 |
| Résolution du scan N&B (dpi) | 600 x 600 |
| Résolution du scan couleur (dpi) | 600 x 600 |
| Résolution d´impression (dpi) | 1200 x 1200 |
| Niveaux de gris (équivalence) - N&B | 256 |
| Plage de zoom Min (%) | 25 |
| Plage de zoom Max (%) | 400 |
| Taux de reproduction prédéfinis | 10 |
| Scanner réseau | Push scan, Pull scan |

## Documents

| | |
|---|---|
| Archivage de documents | Std. |
| Travaux stockés | Copie, Impression, Numérisation |
| Dossiers de stockage | Dossier de fichiers temporaires, Dossier principal, Dossier personnel (max. 1000) |
| Stockage confidentiel | Oui |

## Capacité toner

| | |
|---|---|
| Noir (pages à 6% de taux d'encrage) | 120000 |

## Impression

| | |
|---|---|
| Imprimante réseau | Std. |
| Résolution (dpi) | 1200 x 1200 |
| Résolution (dpi) | 1200 x 1200 |
| Interface : std | USB 2.0, 10Base-T, 100Base-TX, 1000Base-T |
| OS supportés en standard | Windows 8.1, Windows 10, Windows Server 2012, Windows Server 2012R2, Windows Server 2016, Windows Server 2019, Mac OS X 10.8, Mac OS X 10.9, Mac OS X 10.10, Mac OS X 10.11, Mac OS X 10.12, Mac OS X 10.13, Mac OS X 10.14, Mac OS X 10.15, Mac OS X 11 |
| Protocoles réseau | TCP/IP |
| Protocoles d´impression | LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, Novell Printserver application with NDS and Bindery, FPT for downloading print files, EtherTalk printing, IPP |
| Polices disponibles | 80 PCL, 136 PostScript 3 |

## Numérisation

| | |
|---|---|
| Méthodes de scan | Std. |
| Résolution du scan push (dpi) | 100, 150, 200, 300, 400, 600 |
| Résolution du scan pull (dpi) | 75, 100, 150, 200, 300, 400, 600 |
| Formats de fichiers en standard | TIFF, PDF, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Office Open XML (pptx, xlsx, docx), Text (TXT), Rich Text (RFT) |
| Destinations de scan | PC, FTP, Email, SMB, Clé USB |

## Finition

| | |
|---|---|
| Capacité de sortie : Max (feuilles) | 4250 |
| Capacité d'agrafage : Max (feuilles) | 100 |
| Piqûre à cheval | Opt. |
| Décalage | Std. |
| Perforation | Opt. |
| GBC Punch | Opt. |
| Inserter | Opt. |
| Pli | Opt. |

Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: MXM1056EU, 16/11/2026