
[big-pad-interactive-display]

Sharp LM551

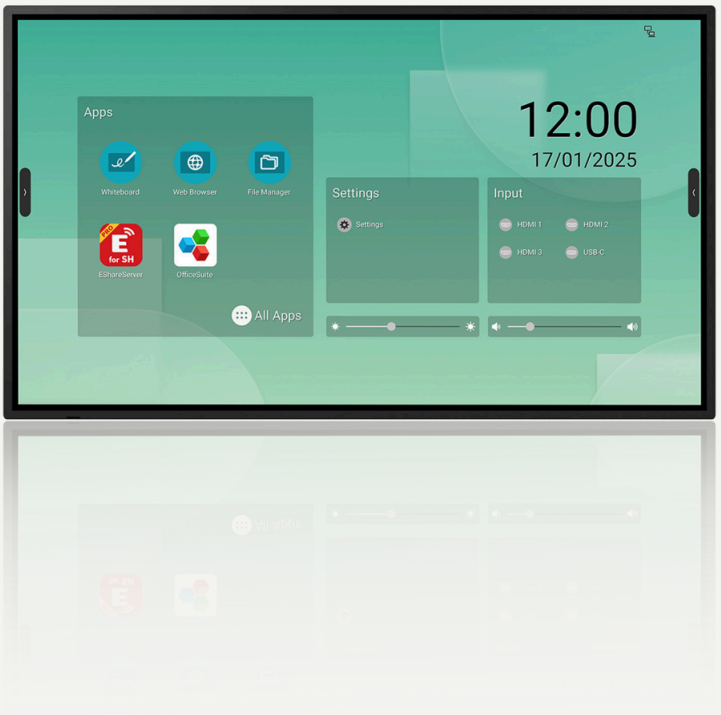

For best-in-class touch performance and value, the Sharp LM series commands feature-rich professional capabilities for small meeting spaces and interactive signage applications.

- Best readability – high brightness panel ensures content is readable even in well-lit environments and anti-glare coating avoids distracting reflections.
- Pen-On-Paper user experience – Zero bonded glass and latest infrared touch technology enable highly accurate and responsive writing and drawing with up to 20 touch points.
- Out-of-the-box collaboration – the integrated Android PC features a powerful home screen launcher offering fast and flexible access to a range of pre-installed applications.
- Highly customizable – a variety of settings allow the display to be optimised to meet the needs of different applications, from small meeting and huddle rooms to touch signage and wayfinding.
- Safe & Secure – latest Android 14 SoC provides a secure operating system which, together with extra security features, meets the highest IT security standards.

Spécifications

Technologie du panneau	VA with Direct LED backlights
Résolution native (Pixels)	3840 x 2160
Filtre pour écran	AG
Technologie de rétro-éclairage	LED
Taux de contraste	5000:1
Temps de réponse (moy. gris à gris) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (8bit + FRC)
Nombre de points de contact	20
Mode stylet intelligent / Mode doigt	Oui
Dureté de l'écran (H)	9
Systèmes d'exploitation compatibles	Android, Linux, Native Multi-Touch, Default Mouse, Chrome OS 87 or higher, Windows 10, Mac OSX, Windows 11
Haze Level [%]	25
Thickness [mm]	3
Touch Method	Doigts, Gants, Pointe du stylet double (3mm/9mm)
Windows Ink	Oui
[AVSpecificationTechnology]	Infrarouge
Paysage	Oui
Portrait	Oui
Spécifications des vis de montage (Taille/Longueur maximale)	M6

Affichage

Taille diagonale (cm)	139

Mécanique

Taille du bézel (G/D) mm	15
Taille du bézel (H) mm	15
Taille du bézel (B) mm	15
Garantie limitée du fabricant (ans)	3
Enceintes intégrées (W)	10 + 10
Entrée ordinateur - Plug and Play	Oui
Gestion de l'alimentation	Oui
Interface pour module d'expansion	Oui
Détecteur de température	Oui
Détecteur de luminosité	Oui
Planification / Minuterie	Oui
Gestion à distance	Oui
Operating Time	18/7
Frame Material	Alliage d'aluminium (face avant); métal (face arrière)
Tension de fonctionnement (ACV) / Fréquence (Hz)	100-240
Tension de fonctionnement (ACV) / Fréquence (Hz)	50-60
Consommation énergétique (W) (Fonctionnement MAX)	145
Storage Temperature [°C]	-10 to 60
[AVSpecificationPowerSavingModeW]	< 2 (Networked Standby)
Rapport CB, CE	Oui
Poids du produit sans le pied (Kg)	33
Poids du produit avec le pied (Kg)	43
HDMI	3

Conditions environnementales

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

© 2026 Sharp Display Solutions Europe GmbH. All rights reserved. All product names, company names, logos, trademarks, service marks and registered trademarks are the property of their respective owners. Design, features and specifications are subject to change without notice. Information is believed to be accurate at the time of publication. Errors and omissions excepted. Revision date: 09 July 2026. Sharp LM551, 9/9/2026